


CARPETTILE







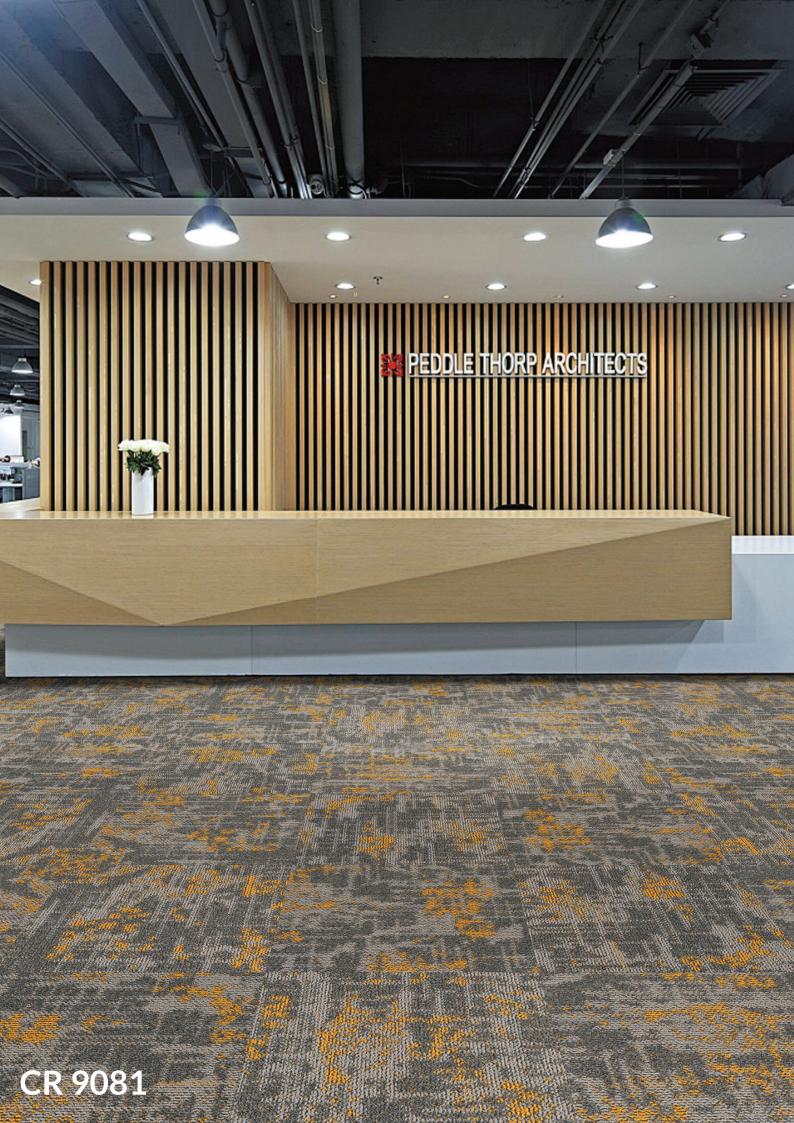












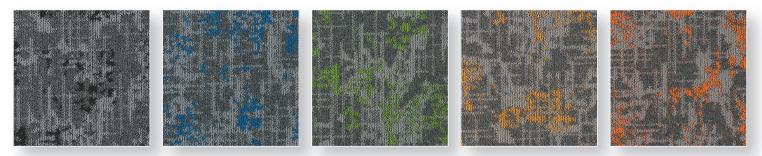

CR 9061

CR 9041

CR 9071

CR 9081

CR 9091


TECHNICAL SPECIFICATION

Construction	Multi-level loop with Cam
Fiber	100% PP
Gauge	1/12"
Pile Weight	600gsm
Total Height	7-8 mm
Primary Backing	Non-woven
Backing	Cushion
Tile Size	50cm x 50cm
Package	5sqms / box

PERFORMANCE SPECIFICATION	
FLAMMABILITY TESTS	
Radiant Panel	Pass - Class I (ASTM E 648-17)
Methenamine Pill	Pass - 8 (ASTM D 2859-16)
Smoke Density	Pass - Max 450 (ASTM E 662-15a)
STABILITY	
Dimensional Stability	Pass - 0.2% (ASTM D7570)
Tuft Bind	Pass - 6.2 lbs (ASTM D1335)
Static Propensity	Pass - 1.1KV (AATCC 134-2011)
Light	Pass - Level 4 (AATCC 16.3)
Rubbing/Crocking	Pass - Level 5 (AATCC 165)
Hexpad Drum	Pass - 2 (ASTM D5252)

MAINTENANCE

- Vacuuming is the most important cleaning procedure. Effective vacuuming prevents soil from spreading through the carpet tile.
- Correct and regular maintenance will increase the lifespan of a carpet tile and also helps to maintain its appearance.
- Cleaning should be proportional to the amount of soiling to which the carpet tile is subjected.
- For a heavy soiled carpet tile, professional cleaning is recommended.
- Technically, carpet tile pigments are better, but color's may fade. If possible the carpet tile should be protected from intense, direct sunlight.
- To reduce soiling and wear high traffic areas, place walk-off mats at all entrances. These must be cleaned and rotated regularly.
- Specification are Subject to ± 5% variation.
- Shading or Pile reversal is nature of carpet and it is not a manufacturing defect.
- Color may slightly vary from one dye lot to another dye lot.



www.panachefloorings.com

